

Europäisches Patentamt  
European Patent Office  
Office européen des brevets



(11) **EP 1 147 495 B1**

(12)

## EUROPEAN PATENT SPECIFICATION

(45) Date of publication and mention  
of the grant of the patent:  
**02.01.2003 Bulletin 2003/01**

(51) Int Cl.<sup>7</sup>: **G07D 7/00, G07D 7/20,  
B41M 3/14**

(21) Application number: **00900703.0**

(86) International application number:  
**PCT/GB00/00129**

(22) Date of filing: **20.01.2000**

(87) International publication number:  
**WO 00/045344 (03.08.2000 Gazette 2000/31)**

### (54) SUBSTRATES FOR PRINTING

SUBSTRAT ZUM DRUCKEN

SUBSTRATS POUR IMPRESSION

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU  
MC NL PT SE**

(30) Priority: **26.01.1999 GB 9901522**

(43) Date of publication of application:  
**24.10.2001 Bulletin 2001/43**

(73) Proprietor: **THE GOVERNOR AND COMPANY OF  
THE BANK OF ENGLAND**  
**London EC2R 8AH (GB)**

(72) Inventors:  
• **FURLEY, Robert, John**  
**Ingatestone, Essex CM4 0DH (GB)**

• **STONE, Robert, George**  
**Elliott-City, MD 21042-4802 (US)**  
• **VAN BRAECKEL, Paul**  
**B-9800 Deinze (BE)**

(74) Representative: **Nash, Keith Wilfrid**  
**KEITH W. NASH & Co.,**  
**90-92 Regent Street**  
**Cambridge CB2 1DP (GB)**

(56) References cited:  
**EP-A- 0 509 917 EP-A- 0 664 642**  
**EP-A- 0 882 599 WO-A-97/40619**  
**GB-A- 2 297 159 US-A- 3 922 539**  
**US-A- 4 715 623**

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid. (Art. 99(1) European Patent Convention).

**EP 1 147 495 B1**

## Description

### Field of Invention

[0001] This invention concerns substrates, primarily papers and in particular to a method of modifying the substrate to make it suitable for use in printing security documents.

### Background to the invention

[0002] It is known to scan a printed document and convert the image into digital data for feeding into a computer. A copy of the original document can be printed out using the digital image data using a laser jet or inkjet printer, and in this situation, the imaging device (usually a scanner), computer and printer, acts like a copier. The stored data can be edited or manipulated using graphics software so that the final print can be a very accurate reproduction of the original. Furthermore, the data can be transmitted for example via the internet or by modem and telephone line to a remote location, or stored for future use on a disk or other memory device, and this technology can be used to counterfeit security documents such as cheques, banknotes, identity documents and the like.

### Prior art

[0003] Methods are known for modifying substrates so that genuine substrates can be identified and distinguished from counterfeit substrates. Typically these methods include marking the genuine substrate with materials which fluoresce under ultra-violet, or which only emit light at some special region of the visible spectrum, or involve the addition of special material such as magnetic materials or infra-red absorbing pigments, or the inclusion of large scale water marking in pictorial or bar code form on or in the substrate. All these methods require either a gross alteration of the substrate (as in watermarking methods) or the inclusion of special materials usually requiring special detectors to determine if the substrate of any document is genuine. Such methods tend to be expensive, the effects are usually readily visible to the naked eye, and it is not impossible to modify paper and other substrates in a similar manner, so as to confuse a verification process. For example, EP No. 0882599 describes a substrate printed with a pattern which can be seen as a single printing but when copied is revealed to the eye as two printings by the copier reproduction system.

### Object of the invention

[0004] It is one object of the present invention to provide a special substrate on which security documents can be printed, having features which will not be reproduced by a photocopier but which can be detected using

a computer or other data processor based image system. However, the features will not normally be reproduced by a copier or printer supplied with image data signals obtained from an unprotected such system, as it can be arranged that if the computer system or copier detects the said features it can therefore refuse to process the image.

### Summary of the invention

[0005] According to one aspect of the present invention a substrate on which a security document is to be printed includes a plurality of physical features in the surface thereof which when illuminated and imaged produce image data signals in the output of a photoelectric device characterised in that:

1. the contrast between the features and the remainder of the substrate surface is selected so that image data signals corresponding to the features are substantially indistinguishable from image data signals relating to the remainder of the substrate surface and/or from background noise signals in the output of the photoelectric device and are thereby indistinguishable by eye; and

2. the features are repeated at intervals over at least some of the surface area of the substrate, whereby time or position of signals relating to each feature will bear at least one fixed relationship to signals relating to other of said features, whereby a computing device supplied with the image data signals can be programmed to identify whether feature signals bearing the said at least one fixed relationship are present in the data, to assist in identifying the imaged document.

[0006] The features may be repeated at regular intervals.

[0007] Each of the physical features may be similar in character to each of the other features in the said surface.

[0008] Documents of the same type may be printed on substrate bearing similar features having a similar fixed relationship over the surface of the substrate. Thus for example bank notes of one denomination may be printed on a substrate having surface features of a particular type and one or more particular spacings.

[0009] The spacing may be selected so as to be constant in one direction only or varied according to a special, known pattern.

[0010] A similar or different regular spacing may be selected for features in another direction bearing a particular spacial relationship relative to the first said direction, for example perpendicular to the said first direction.

[0011] In a preferred example the features are arranged in a 2D matrix in the substrate surface.

[0012] The existence of such features in a substrate

surface constitutes a primary encoding of the substrate allowing substrates to be distinguished from substrates not containing said features, or to be distinguished one from another depending on the choice of features.

**[0013]** Secondary encoding of a substrate may be achieved by introducing a variation into the matrix such as by omitting features from particular positions in such a regular matrix.

**[0014]** Thus for example every fourth feature along each third line may be omitted.

**[0015]** Preferably security documents are encoded using both primary and secondary encodings.

**[0016]** In addition or alternatively secondary encoding may be provided if the matrix is formed from features having two distinctive characteristic and, instead of omitting features at specific positions within the matrix, features of one type are located at one set of positions in the matrix, and features of the other type are located at other positions in the matrix. Thus in a simple example one set of features may be generally circular in shape, whereas interspersed features producing a secondary encoding may have a different readily distinguishable shape such as rectangular or triangular.

**[0017]** Since the encoding of a substrate can be achieved by selecting the spacing between features or selecting features having a specific characteristic such as shape which can be identified in image data signals relating thereto, and/or by the substitution of features having a first characteristic at selected points in a regularly occurring matrix of such features by other features having a second different characteristic, and/or the omission of features at particular points in a matrix, there is an almost infinite number of possible combinations and permutations available to encode security document substrates.

**[0018]** Therefore not only does the invention permit a reliable method for identification of security documents, so as to readily detect forgeries which are not printed on an appropriate substrate, but each individual type of security document such as banknotes of different denominations, cheques originating from different banks, passports issued by different offices, and the like, if desired can be uniquely identified by a particular primary and/or secondary encoding selected for the substrate on which they are to be printed.

**[0019]** Image analysis techniques for identifying the presence of regularly occurring patterns and/or drop-outs within regularly occurring patterns and/or shape(s) or other visibly distinguishable features of detectable features in an image, are readily available and known, and by using high speed processors such as DSPs and the like, image data can be checked and verified or otherwise, virtually instantaneously as documents are scanned.

**[0020]** Preferably a physical feature is selected for encoding the surface of a substrate to provide a primary encoding, which will not appear in the electrostatic image of a photocopier. This ensures that attempts to re-

produce the original by photocopying will merely produce a copy containing the printed content of the document unless the substrate onto which it is copied contains the correct physical encoding in the surface thereof.

**[0021]** More preferably, if a secondary encoding is present, any variation in the primary encoding which constitutes the secondary encoding is even less capable of being distinguished by the naked eye or picked up by a photosensitive device as used in a photocopier.

**[0022]** Preferably the physical feature encoding is in the form of a repeat pattern.

**[0023]** As the identification features are such that the appearance of the security document (for example a bank note) is not affected or disturbed aesthetically, since in the case of banknotes, the introduction of new notes provided on substrate according to the invention is permissible alongside existing banknotes printed on unencoded substrate, since if the general appearance of the documents is unchanged to the naked eye, old but nevertheless authentic notes which do not contain the physical feature encoding on the substrate surface provided by the invention, will appear similar to banknotes printed on encoded substrate.

**[0024]** Examples of physical feature encoding of a substrate as aforesaid comprise, embossing with inkless intaglio or embossing the surface by calendaring during manufacture of the substrate.

**[0025]** Two or more different encoding techniques may be combined in any substrate.

**[0026]** The invention also lies in impressing in the surface of a substrate onto which a security document is to be printed indentations and/or grooves in accordance with a first pattern which contains encoded therein a second pattern, to enable a security document printed on such a substrate to be identified by subjecting image data signals obtained from scanning the document to an appropriate mathematical algorithm to determine whether the second pattern can be found in image data signals relating to the first pattern.

**[0027]** A pattern may be encoded to produce multiple iterations of a code on the substrate.

**[0028]** The encoded pattern may not extend over the whole of the surface of the substrate forming each document but only over selected areas which align with particular printed areas of the substrate, and according to another aspect of the invention, the printed areas are selected so as to enhance the detection of the substrate surface variation during scanning and conversion of the image into image data signals.

**[0029]** Redundancy created by multiple iterations can be used to advantage since the large number of similar iterations enhances the detectability of the code by increasing the effective signal to noise ratio. This in combination with the selection of particular regions of the printed areas of the final document in which to locate the iterations, facilitates the detection by a data processor of the presence of an otherwise substantially invis-

ble pattern in the data signals derived from the scanning.

[0030] For a document identification system to work, the encoding of the documents must be capable of being read for example by optically scanning the documents and generating image data signals which can be handled by a computer, or by using a specialist imaging and image analysing apparatus performing this function.

[0031] The invention also lies in a security document substrate adapted to be identifiable as such by having detectable surface features therein features to enable identification as aforesaid.

[0032] The invention also lies in a security document when printed on a substrate as aforesaid.

[0033] A primary application of the invention lies in treating the surface of a substrate as aforesaid for use in the production of security documents so as to inhibit or degrade the reproduction of such security documents using a scanning process which converts the image into image data signals for controlling a printing process, in which a second control is introduced if surface encoding is detected by subjecting the image data signals to an appropriate algorithm, which second control serves to downgrade or inhibit the printing process so as to prevent the reproduction of the original document, or of a good quality reproduction thereof.

[0034] Thus, the invention also provides a method of verification, of a security document when printed on a substrate as aforesaid wherein in a first step of verification a scanning process is employed to convert the image of the surface of the substrate of the document into image data signals for controlling a printing process, and when surface encoding is detected, a second step of verification is introduced by subjecting the image data signals to an appropriate algorithm, said second step of verification, if failing, serving to downgrade or inhibit the printing process so as to prevent reproduction of the document, or at least a good quality reproduction thereof.

[0035] Thus for example bank note authentication devices can be provided at relatively low cost to be associated with tills in shops, banks and post offices, so that at transaction points bank notes tendered by the public can be verified before they are accepted.

[0036] In the case of a currency note, it may be of further interest to determine what denomination it is, and if more than one originating organisation is involved, it may also be advantageous to determine which organisation issued the note. Computer based document checking facilities of this type can be used as note accepters, can be used in note exchangers, and can be used to enable blind persons to discover what bank notes they have in their possession.

#### Description of different encoding techniques

[0037] The surface treatment of a substrate in accordance with the invention includes any technique which results in lighter and darker regions to be visible in the

surface of a treated sheet of substrate when illuminated for scanning.

[0038] Either or both primary and secondary encodings may be in the form of repeat pattern which are distinguishable under appropriate illumination to provide detectable content in digital signals obtained by scanning.

#### (1) Embossing

[0039] In a first technique embodying the invention, the substrate may be embossed during its manufacture. Thus it is customary in paper or sheet plastics manufacture to make the material smooth enough for printing by passing it through a high pressure nip between two steel rollers, a process known as calendaring. By forming one or both of these rollers with indentations, a paper or plastics substrate forced therebetween, will be formed with an embossing pattern corresponding to the indentations. By suitably encoding the embossed features, the substrate will be encoded as required by the invention, and can be detected by suitable illumination and converted into digital data signals by a scanner for analysis by a data processor.

#### (2) Surface treatment of lacquered papers

[0040] Where a paper or plastics substrate material has mixed therewith a resin or lacquer or other material to provide a smooth surface for printing, an encoded structure can be formed in the surface such that the actual surface of the substrate is sufficiently smooth to accept printing ink to enable a security document to be printed thereon, but at the same time contains a fine pattern of less smooth regions, which may be less receptive of printing ink.

#### (3) Impregnation

[0041] The surface may also be modified by a technique in which selected regions of a substrate describe a repeat pattern by being impregnated with a fluid such as a resin, or lacquer, such that the optical absorption or reflectance characteristics or optical density of the substrate is altered sufficiently as between impregnated and non-impregnated areas as to be discernable under incident light as during scanning for digitising.

#### (4) Laser treatment

[0042] The surface of the substrate can be etched by a laser beam, so as to produce cavities or grooves in the surface to be printed (or awaiting printing). This technique lends itself to the production of very fine patterns in the surface of the substrate and since a laser beam can be modulated very accurately can be used to introduce depth modulation in any such grooves or cavities as well as or instead of edge or thickness of spacing

modulation.

#### (5) Watermarking

**[0043]** Watermarks alter the thickness and/or texture of a substrate, which variations and/or can be rendered visible under incident light and can be used to form primary and/or secondary encoding of the invention. They may be formed in two ways.

**[0044]** In the Fourdrinier paper making method, the wet paper is embossed using an embossing roller as it is being formed, thereby impacting a mark in the paper corresponding to the embossing. By forming the embossing in a suitable repeat pattern which extends over the area of the web, so the paper can be encoded with the watermark pattern.

**[0045]** A second technique for forming a watermark uses the so-called cylinder-mould method. In this method the watermark is formed by a cylindrical wire mesh on which is impressed "mouldings" in the form of images. During manufacture of the paper, fibres build up to a greater or lesser extent on the mesh mouldings and where the thickness of the paper is greater, this gives a darker effect when viewed in transmission than do regions which are thinner and therefore which appear lighter when viewed in transmission. However where either types of watermark is just visible in incident light this can be used to provide the background coding required by the invention.

**[0046]** In accordance with the invention either watermarking technique may be employed to apply a pattern in the surface of a substrate especially a paper substrate, which is virtually imperceptible to the naked eye, but which will appear as a low contrast pattern when subjected to incident light as where a document is arranged for scanning and digitising.

**[0047]** The techniques so far described provide a surface encoded substrate which subsequently can be printed to form a security document. However some of the encoding techniques, eg embossing, may be applied after some or all of the printing of the document has occurred.

**[0048]** For example embossing may be applied after a title, or other text, or personal data for example in the case of an ID document has been printed onto a plain substrate, and a surface encoding formed as a post-printing step.

**[0049]** Encoding by embossing can be achieved whilst printing at least some regions of a document. Thus the surface encoding may be imparted to the document by so-called "blind" intaglio printing, or intaglio printing with colourless ink. In such a method an image is printed using a plate containing engraved areas, some of which are filled with ink and some of which are left empty in the case of blind intaglio printing. The engraved plate, inked as appropriate, is pressed under high pressure against the substrate so as to cause the ink to transfer to the substrate. The substrate can be-

come embossed with the engraved image, under the pressure applied, with parts of the substrate surface being printed, and others merely embossed.

#### 5 Description of Drawings

**[0050]** In the accompanying drawings:-

Figure 1 shows a banknote substrate physically formed with barcode features in practice not discernable to the naked eye;

Figure 2 shows a banknote image printed over the substrate;

Figure 3 is a flow chart of the process for embossing the barcode features on the substrate;

Figures 4 and 5 show images of the banknote revealed by a computer code extraction routine; and

Figure 6 is a flow chart of one possible detection routine.

#### 25 Description of Embodiment

##### Production

**[0051]** The process for physically forming in this case embossing, identification features on a banknote (or other security document) substrate will be clear from Figure 3 without further description.

**[0052]** The resulting substrate is shown in Figure 1, except that in practice the identification features, in this case a repetitive barcode pattern, would be invisible to the naked eye.

**[0053]** The banknote is conventionally printed over the substrate and the result is shown in Figure 2.

**[0054]** Since in practice the identification features are invisible to the naked eye, they are not aesthetically disturbing and do not affect the freedom of design of the banknote image. It is to be noted that the banknote design may be printed either before or after the identification features physically formed in this case by embossing (Figure 3).

##### Detection

**[0055]** There are various ways that computer based equipment can detect the aforesaid identification features and two such methods are described hereinafter.

**[0056]** The encoded document when scanned into a computer, is converted to a digital format. This typically means that the image is analysed into red, green and blue channels for each picture element or pixel. The colour of the picture element is assigned a value in each of these channels on a scale from 0 to 255 (8 bits) typically such that a full intensity is assigned to the value

255 and 'no colour' the value 0. Thus, bright white will be represented by all three channels having the value 255 and black by a zero intensity having the value 0.

[0057] When a real image, such as that of the printed banknote is scanned into the system, most of the pixel values will lie in a central region between, say, 230 for the paper background and 40 for the darkest print. The pixels relating to the embossed encoding will be affected by the shadowing from the embossing caused by the lighting in the detection device. They will generally be within a band close to the paper background values.

[0058] Assume, for example, that the embossing is shallow so that the shadows are weak and mainly within a band of 20 grey scale values relative to that of the paper background.

[0059] It is a simple matter for a computer program to reset all values between a value just below that of the paper (in this example, 228) and the bottom of the values relating to the encoding band (in this example say, 210) to a value of 10, or even zero (near black) and to reset all other values between 210 and 0 in this example to 230 (in other words the same colour as the paper background).

[0060] This procedure has the effect of eliminating all the printed design features but not the encoding and those very weak features associated with the design, which are usually very few in number since they cannot be easily seen and would not therefore be included in the design for aesthetic reasons. The embossed encoding itself would by this procedure now be rendered black (see Figure 4) so that it can be read by a program especially designed to recognise the coding. As a simple sample, if the coding were a series of Alphanumeric characters such as letters and numbers, an optical character recognition program could be used to read the data and determine if it was likely to be a known code. Alternatively, more sophisticated image detection techniques could be used, especially if the coding were of a more complex type such as that used in digital watermarking for example. In some cases, it may be preferred in order to show the encoding only (Figure 6).

[0061] Alternatively, the embossed encoding could be extracted using a contrast enhancement routine such as is commonly known as 'equalisation'. This is shown in Figure 6. This type of routine sets the maximum value of the pixels in each channel to 255 and the minimum value to 0 and then attempts to smoothly redistribute the intervening pixel values between the two. This has the effect of increasing the difference between the pixel values close to the paper background and thus those relating to the code so that they are easier to recognise in an image recognition program or routine. This method has the disadvantage that other design features unrelated to the code are still present and need to be disregarded by the recognition routine.

[0062] However, more sophisticated routines, can be used which recognise complex encoding patterns such as those used for high-level codes in complex images

and patterns.

## Claims

1. A substrate on which a security document is to be printed comprising a plurality of identification features in the surface thereof, which when illuminated and imaged by scanning, produce image data signals in the output of a photoelectric device characterised in that:

(i) the contrast between the identification features and the remainder of the substrate surface is such that image data signals corresponding to said features are substantially indistinguishable from image data signals relating to the remainder of the substrate surface and/or from background noise signals in the output of the photoelectric device and are thereby indistinguishable by eye; and

(ii) the features repeat at intervals over at least some of the surface area of the substrate, whereby upon validation time or position of signals relating to each feature will bear at least one fixed relationship to signals relating to other of said features, whereby a computing device supplied with the image data signals can be programmed to identify whether feature signals bearing the said at least one fixed relationship are present in the data, to assist in identifying the imaged document.

2. A substrate according to claim 1, wherein the identification features are repeated at regular intervals.
3. A substrate according to claim 1 or claim 2, wherein each of the identification features is similar in character to each of the other features in the said surface.
4. A substrate according to any of claims 1 to 3, wherein the spacing of identification features is such as to be constant in one direction only or varied according to a special, known pattern, and similar or different regular spacings are selected for features in another direction, bearing a particular spacial relationship relative to the first said direction, for example perpendicular to said one direction.
5. A substrate according to any one of claims 1 to 4, wherein the features are arranged in a 2D matrix in the substrate surface.
6. A substrate according to claim 5, having a secondary encoding comprising a variation introduced into the matrix, such as by omitting features from partic-

ular positions in such a regular matrix.

7. A substrate according to claim 5, wherein the matrix comprises features having two distinctive types of characteristics, the features of one type being located at one set of positions in the matrix, and the features of the other type being located at other positions in the matrix. 5
8. A substrate according to any one of claims 1 to 7, wherein the identification feature encoded in the surface provides a primary encoding which will not appear in the electrostatic image of a photocopier. 10
9. A substrate according to claim 8, wherein the identification feature encoding is in the form of a repeating pattern. 15
10. A substrate according to claim 8 or claim 9, wherein the identification feature encoding comprises an embossing with inkless intaglio or an embossing of the surface by calendaring during manufacture of the substrate. 20
11. A substrate according to any one of claims 1 to 10, wherein two or more different encoding techniques are combined in the substrate. 25
12. A substrate according to claim 11, wherein the identification features are impressed in the surface of a substrate onto which a security document is to be printed, comprising indentations and/or grooves in accordance with a first pattern which contains encoded therein a second pattern, thereby to enable a security document printed on such a substrate to be identified by subjecting image data signals obtained from scanning the document to an appropriate mathematical algorithm to determine whether the second pattern can be found in image data signals relating to the first pattern. 30 35 40
13. A substrate according to any one of claims 1 to 12, wherein the pattern is encoded to produce multiple iterations of a code on the substrate.
14. A substrate according to any one of claims 1 to 13, wherein the encoded pattern extends over selected areas which align with particular printed areas of the substrate. 45 50
15. A substrate according to claim 14, wherein the printed areas are such as to enhance the detection of the substrate surface variation during scanning and conversion of the image into image data signals. 55
16. A surface treated substrate in accordance with any one of claims 1 to 15, having any lighter and darker regions visible in the surface of a treated sheet of

substrate when illuminated for scanning, but not visible to the eye.

17. A substrate according to claim 16, in which the identification features are embossed during its manufacture.
18. A substrate according to claim 16, comprising paper or plastics material mixed with a resin or lacquer or other material to provide a smooth surface for printing, and an encoded structure in the surface such that the actual surface is sufficiently smooth to accept printing ink to enable a security document to be printed thereon, but at the same time contains a fine pattern of less smooth regions, which are less receptive of printing ink.
19. A substrate according to claim 16 wherein selected regions describe a repeat identification pattern by being impregnated with a fluid such as a resin, or lacquer, such that the optical absorption or reflectance characteristics or optical density of the substrate is altered sufficiently as between impregnated and non-impregnated areas as to be discernable under incident light.
20. A substrate according to claim 16, in which the surface is etched as by a laser beam, so as to produce cavities or grooves in the surface to be printed (or awaiting printing).
21. A substrate according to claim 16, comprising watermarking to vary the thickness and/or texture of a substrate, which variations can be rendered visible under incident light and form the primary and/or secondary encoding.
22. A substrate according to any of claims 1 to 21, **characterized in that** said substrate is a security document substrate.
23. A security document when printed on a substrate as claimed in any of claims 1 to 22.
24. A method of verification of a security document according to claim 22 or claim 23, wherein in a first step of verification a scanning process is employed to convert the image of the surface of the substrate of the document into image data signals for controlling a printing process, and when surface encoding is detected, a second step of verification is introduced by subjecting the image data signals to an appropriate algorithm, said second step of verification, if failing, serving to downgrade or inhibit the printing process so as to prevent reproduction of the document, or at least a good quality reproduction thereof.

# Patentansprüche

1. Ein Substrat, auf dem ein Sicherheitsdokument gedruckt wird, das eine Vielzahl an Identifizierungsmerkmalen auf der Oberfläche enthält, die bei einer Beleuchtung und Darstellung durch Scannen Bild-  
datensignale in einem photoelektrischen Ausgabe-  
gerät erzeugen, welche wie folgt charakterisiert  
werden:  
  
(i) der Kontrast zwischen den Identifizierungs-  
merkmalen und der übrigen Substratoberflä-  
che ist derart, dass Bilddatensignale entspre-  
chend besagter Merkmale kaum von Bilddaten-  
signalen, die sich auf der übrigen Substratober-  
fläche befinden, und/oder von Störsignalen im  
Hintergrund des photoelektrischen Ausgabe-  
geräts unterscheidbar sind und daher nicht  
vom Auge unterschieden werden können;  
  
(ii) die Merkmale wiederholen sich in kurzen  
Abständen auf zumindest einem Teil des Ober-  
flächenbereichs des Substrats, wodurch bei  
der Validierung die Zeit oder Position der Si-  
gnale eines jeden Merkmals zumindest eine  
festgesetzte Beziehung zu Signalen anderer  
Merkmale haben, Dadurch kann ein datenver-  
arbeitendes Gerät, das mit den Bilddatensigna-  
len gespeist wurde, so programmiert werden,  
dass es feststellen kann, ob Merkmalsignale,  
die mindestens eine der festgesetzten besag-  
ten Beziehungen haben, bei den Daten vorhan-  
den sind, um so zur Identifizierung des darge-  
stellten Dokuments beizutragen.
2. Ein Substrat nach Anspruch 1, worin die Identifizie-  
rungsmerkmale in regelmäßigen Abständen wie-  
derholt werden.
3. Ein Substrat nach Anspruch 1 oder Anspruch 2,  
worin jede der Identifizierungsmerkmale in ihrer Art  
einer jeden der anderen Merkmale auf der besagten  
Oberfläche ähnelt.
4. Ein Substrat nach einem der Ansprüche 1 bis 3,  
worin der Abstand der Identifizierungsmerkmale  
derart ist, dass er gleichbleibend nur in eine Rich-  
tung geht oder nach einem speziellen, bekannten  
Muster variiert, Ähnliche oder unterschiedliche re-  
gelmäßige Abstände werden für Merkmale gewählt,  
die in eine andere Richtung gehen, wobei eine  
räumliche Beziehung vorliegt, die im Verhältnis zur  
ersten Richtung steht, z. B. senkrecht zur besagten  
Richtung.
5. Ein Substrat nach einem der Ansprüche 1 bis 4,  
worin die Merkmale in einer 2D-Matrix auf der Sub-  
stratoberfläche angeordnet sind.
6. Ein Substrat nach Anspruch 5, das eine sekundäre  
Verschlüsselung besitzt, die aus einer in die Matrix  
eingefügten Abwandlung besteht, wie beispielswei-  
se dem Auslassen von Merkmalen bei bestimmten  
Positionen in solch einer regelmäßigen Matrix.
7. Ein Substrat nach Anspruch 5, worin die Matrix aus  
Merkmalen besteht, die zwei unterschiedliche Aus-  
prägungsarten besitzen, Die Merkmale der einen  
Art befinden sich auf einer Reihe der Positionen und  
die Merkmale der anderen Art befinden sich auf an-  
deren Positionen in der Matrix.
8. Ein Substrat nach einem der Ansprüche 1 bis 7,  
worin das Identifikationsmerkmal, das auf der Ober-  
fläche verschlüsselt ist, eine primäre Verschlüsse-  
lung liefert, die nicht auf dem elektrostatischen Bild  
eines Photokopiergeräts erscheint.
9. Ein Substrat nach Anspruch 8, worin die Verschlüs-  
selung des Identifikationsmerkmals aus sich wie-  
derholenden Mustern besteht.
10. Ein Substrat nach Anspruch 8 oder Anspruch 9,  
worin die Verschlüsselung des Identifikationsmerk-  
mals aus einer Prägung mit farblosem Tiefdruck  
oder einer Oberflächenprägung durch Kalandrie-  
rung während der Herstellung des Substrats be-  
steht.
11. Ein Substrat nach einem der Ansprüche 1 bis 10,  
worin zwei oder mehr unterschiedliche Verschlüs-  
selungstechniken im Substrat kombiniert werden.
12. Ein Substrat nach Anspruch 11, worin die Identifi-  
zierungsmerkmale auf die Oberfläche eines Sub-  
strats aufgeprägt werden, auf die ein Sicherheits-  
dokument gedruckt werden soll, Dieses Substrat  
besitzt Vertiefungen und/oder Rillen, die mit einem  
ersten Muster übereinstimmen, in das ein zweites  
Muster verschlüsselt ist, Somit kann ein auf ein sol-  
ches Substrat gedruckte Sicherheitsdokument da-  
durch identifiziert werden, dass Bilddatensignale,  
die durch Scannen des Dokuments erlangt wurden,  
einem entsprechenden mathematischen Algorith-  
mus unterlaufen, um festzustellen, ob das zweite  
Muster bei Bilddatensignalen, die sich aufs erste  
Muster beziehen, gefunden werden kann.
13. Ein Substrat nach einem der Ansprüche 1 bis 12,  
worin das Muster verschlüsselt ist, um Mehrfach-  
wiederholungen eines Codes auf dem Substrat zu  
produzieren.
14. Ein Substrat nach einem der Ansprüche 1 bis 13,  
worin sich das verschlüsselte Muster über ausge-  
wählte Bereiche ausdehnt, die sich auf bestimmte  
bedruckte Bereiche des Substrats ausrichten.



15. Ein Substrat nach Anspruch 14, worin die bedruckten Bereiche derart sind, dass sie die Entdeckung der Substratoberflächenvariation während des Scannens und der Umwandlung des Bildes zu Bilddatensignalen verbessern. 5
16. Ein oberflächenbehandeltes Substrat nach einem der Ansprüche 1 bis 15, bei dem hellere und dunklere Regionen auf der Oberfläche eines behandelten Bogens des Substrats sichtbar sind, wenn sie 10 zum Scannen beleuchtet werden, Sie sollen für das Auge nicht sichtbar sein.
17. Ein Substrat nach Anspruch 16, bei dem die Identifizierungsmerkmale während der Herstellung auf- 15 geprägt werden.
18. Ein Substrat nach Anspruch 16, das Papier- oder Plastikmaterialien, die mit Harz, Lack oder andere Materialien gemischt wurden, so dass für das Drucken eine glatte Oberfläche vorhanden ist, sowie einer verschlüsselten Struktur auf der Oberfläche, so 20 dass die eigentliche Oberfläche glatt genug ist, um Druckfarbe anzunehmen, damit ein Sicherheitsdokument darauf gedruckt werden kann, Gleichzeitig ist jedoch ist ein feines Muster mit weniger glatten Bereichen vorhanden, die die Druckfarbe nicht so sehr aufnehmen. 25
19. Ein Substrat nach Anspruch 16, worin ausgewählte 30 Bereiche ein Wiederholungsidentifikationsmuster beschreiben, indem sie mit einer Flüssigkeit wie einem Harz oder einem Lack imprägniert werden, so dass die optische Absorption, die Reflektionseigenschaften oder die optische Dichte des Substrats ge- 35 nügend zwischen imprägnierten und nicht imprägnierten Bereichen verändert werden, um unter einfallendem Licht erkennbar zu sein.
20. Ein Substrat nach Anspruch 16, bei dem die Ober- 40 fläche von einem Laserstrahl geätzt wird, um Löcher oder Rillen in der Oberfläche, die gedruckt werden soll (oder sich vor dem Drucken befindet), einzuarbeiten. 45
21. Ein Substrat nach Anspruch 16, das ein Wasserzeichen enthält, um die Dichte und/oder Oberflächenstruktur eines Substrates zu variieren, dessen Va- 50 riationen unter einfallendem Licht sichtbar gemacht werden können und die primäre und/oder sekundäre Kodierung bilden.
22. Ein Substrat nach einem der Ansprüche 1 bis 21, das dadurch charakterisiert ist, dass genanntes Substrat ein Sicherheitsdokumentsubstrat ist. 55
23. Ein Sicherheitsdokument erfolgt, wenn es auf einem der in einem der Ansprüche 1 bis 22 angege-

benen Substrate gedruckt wird.

24. Eine Methode der Verifizierung eines Sicherheitsdokuments nach Anspruch 22 oder Anspruch 23, 5 worin in einem ersten Verifizierungsschritt ein Scannverfahren angewendet wird, um das Bild der Oberfläche des Substrats des Dokuments in Bilddatensignal zur Steuerung des Druckprozesses, Wenn die Oberflächenkodierung erkannt wird, wird ein zweiter Verifizierungsschritt eingeführt, indem 10 die Bilddatensignale einem geeigneten Algorithmus unterlaufen, besagter zweiter Verifizierungsschritt, dient dazu, dass bei Versagen der Druckprozess zurückgestuft oder blockieren wird, um die Reproduktion des Dokuments zu verhindern, oder zumindest eine hochqualitative Reproduktion da- 15 von.

## 20 Revendications

1. Un substrat sur lequel un document de sécurité doit être imprimé ayant une pluralité de caractéristiques d'identification sur la surface décrite, ci-dessus ain- 25 si une fois illuminés et imagés par un scannage, produit des signaux d'image dans la sortie de l'appareil photoélectrique définies comme suit :
  - (i) la différence entre les caractéristiques d'identification et le reste de la surface du sub- 30 strat est que les signaux d'image correspondant aux lesdites caractéristiques sont complètement indistincts des signaux d'image de la surface du substrat et/ou les signaux de bruit de fond dans la sortie de l'appareil photoélectrique, de fait, il est impossible de les distinguer à l'oeil ; et
  - (ii) les caractéristiques sont répétées par inter- 35 valles sous la forme d'au moins une partie de la surface du substrat, par lesquels, sur validation, le temps ou la position des signaux de chaque caractéristique ait au moins un rapport fixé aux signaux en rapport avec les autres dites ca- 40 ractéristiques, par lesquels un appareil informatique fourni avec des signaux d'image peut être programmé afin d'identifier si les signaux portent une caractéristique, au moins un dit rap- 45 port fixé est présent dans les données e pour assister à l'identification du document imagé.
2. Un substrat conforme à la revendication 1, selon la- 50 quelle les caractéristiques d'identification sont répétées par intervalles réguliers.
3. Un substrat conforme à la revendication 1 ou à la revendication 2, selon lesquelles chacune des ca- 55 ractéristiques d'identification est similaire aux par-

ticularités de chacune des autres caractéristiques d'identification dans ladite surface.

4. Un substrat conforme à n'importe quelle revendication 1 à 3, selon lesquelles l'espacement des caractéristiques d'identification est de nature à être constamment dans une seule direction ou varié selon la forme prédéterminée, et des espacements réguliers similaires ou différents sont sélectionnés pour les caractéristiques dans d'autres directions portant un rapport spatial particulier relatif à ladite première direction, par exemple, perpendiculaire à ladite première direction. 5
5. Un substrat conforme à n'importe quelle revendication 1 à 4, selon lesquelles les caractéristiques d'identification sont organisées dans une matrice 2D dans la surface du substrat. 10
6. Un substrat conforme à la revendication 1, qui a un codage secondaire du substrat comprenant des variations dans la matrice telle que la suppression des caractéristiques à partir des positions particulières à l'intérieur d'une matrice régulière. 15
7. Un substrat conforme à la revendication 5, selon laquelle la matrice est conçue à partir de caractéristiques ayant deux types distinctifs de particularités. Les caractéristiques d'un seul type sont localisées dans un seul ensemble de positions à l'intérieur de la matrice, alors que les caractéristiques de l'autre type sont localisées dans d'autres positions à l'intérieur de la matrice. 20
8. Un substrat conforme à n'importe quelle revendication 1 à 7, selon lesquelles la caractéristique d'identification, codée sur la surface, fournit un codage primaire qui n'apparaît pas dans l'image électrostatique d'un photocopieur. 25
9. Un substrat conforme à la revendication 8, selon laquelle le codage de la caractéristique d'identification est sous forme répétée. 30
10. Un substrat conforme à n'importe quelle revendication 8 à 9, selon lesquelles le codage de la caractéristique d'identification comprend un gaufrage avec une gravure qui n'a pas été encrée ou un gaufrage de la surface en établissant une liste lors de la conception du substrat. 35
11. Un substrat conforme à n'importe quelle revendication 1 à 10, selon lesquelles deux ou plusieurs techniques différentes de codage sont associées dans le substrat. 40
12. Un substrat conforme à la revendication 11, selon laquelle les caractéristiques d'identification sont gaufrées dans la surface du substrat sur lequel un document de sécurité doit être imprimé, comprenant des identifications et/ou des rainures conforme à la première forme qui contient en l'espèce une seconde forme codée, par laquelle permettra un document de sécurité imprimé sur un tel substrat afin d'être identifié en soumettant des signaux d'image obtenue en balayant le document à un algorithme mathématique approprié pour déterminer si la seconde forme peut être trouvée dans les signaux d'image ayant rapport avec la première forme. 45
13. Un substrat conforme à n'importe quelle revendication 1 à 12, selon lesquelles la forme est codée afin de produire plusieurs itérations de code sur le substrat. 50
14. Un substrat conforme à n'importe quelle revendication 1 à 13, selon lesquelles la forme codée s'étend sur des parties sélectionnées qui s'alignent avec des parties imprimées particulières du substrat. 55
15. Un substrat conforme à la revendication 14, selon laquelle les parties imprimées sont de nature à mettre en valeur la détection de la variation de la surface du substrat lors du scannage et conversion de l'image en signaux d'image.
16. Une surface du substrat est traitée conforme à n'importe quelle revendication 1 à 15, qui lorsque illuminée à cause d'un scannage, elle contient des parties éclairées et foncées qui sont visibles dans la surface d'une feuille traitée du substrat mais ne sont pas visibles à l'oeil.
17. Un substrat conforme à la revendication 16, selon laquelle les caractéristiques d'identification sont embossées lors de leur conception.
18. Un substrat conforme à la revendication 16, ayant des matériaux en papier ou en pastiques mélangés avec une résine ou un vernis-laque ou autre matériau afin d'obtenir une surface lisse lors de l'impression et une structure de codage sur la surface pour que la véritable surface du substrat soit suffisamment lisse pour que l'encre d'impression y adhère et permette au document de sécurité d'y être imprimé, en même temps il contiendra une fine partie de régions moins lisses, moins réceptives à l'encre d'impression.
19. Un substrat conforme à la revendication 16 selon laquelle des parties sélectionnées décrivent une forme répétée d'identification en étant imprégnée d'un liquide telle que de la résine ou du vernis-laque, l'absorption optique et les caractéristiques de réflexion ou la densité optique du substrat est suffisamment modifiée aussi bien entre les parties im-

prégnées et les parties non-imprégnées qu'avec une faible lumière.


20. Un substrat conforme à la revendication 16, dans laquelle la surface du substrat est gravée à l'eau-forte par des rayons de laser afin de produire des cavités ou des rainures sur la surface à imprimer (ou attendant d'être imprimée). 5
21. Un substrat conforme à la revendication 16, ayant un moirage est utilisé afin de varier l'épaisseur et/ou la texture du substrat, dont les variations peuvent être rendues visibles à une faible lumière et forment le codage primaire et / ou secondaire. 10 15
22. Un substrat conforme à n'importe quelle revendication 1 à 21, caractérisé en ce que ledit substrat est un substrat de document de sécurité.
23. Un document de sécurité lorsqu'il est imprimé sur un substrat comme revendiqué dans n'importe quelle revendication 1 à 22. 20
24. Une méthode de vérification concernant le document de sécurité conforme à la revendication 22 ou la revendication 23, selon lesquelles dans la première étape de vérification un processus de scan-nage est utilisé afin de convertir de la surface du substrat du document en signaux d'image relatif au processus d'impression, et la surface codée est détectée, une seconde étape de vérification est introduite en soumettant les signaux d'image à un algorithme approprié, ladite seconde étape de vérification, lors d'un échec, servant à libérer partiellement ou interdire le processus d'impression afin d'éviter la reproduction du document, ou au moins une reproduction de grande qualité de celui-ci. 25 30 35

40

45


50

55

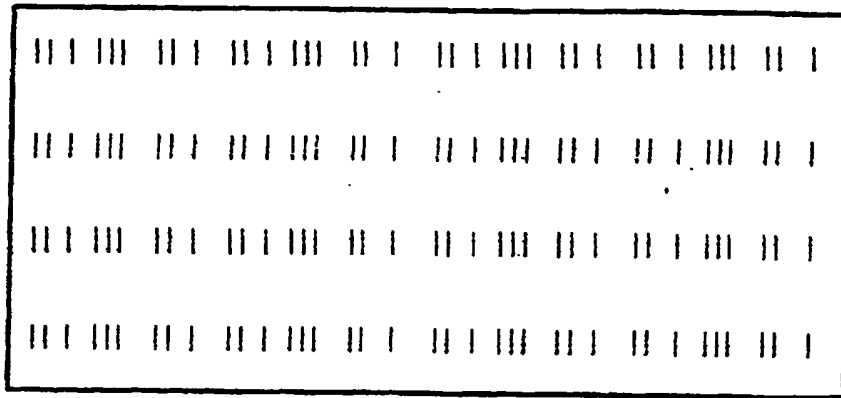


Substrate embossed with barcode

*Fig. 1*

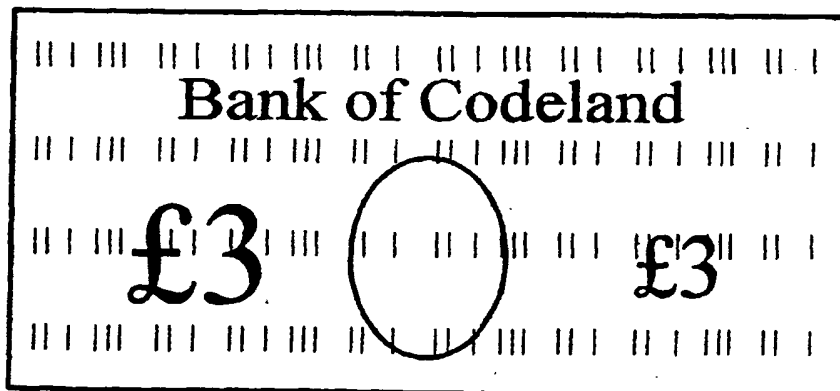


Banknote image printed over coding

*Fig. 2*

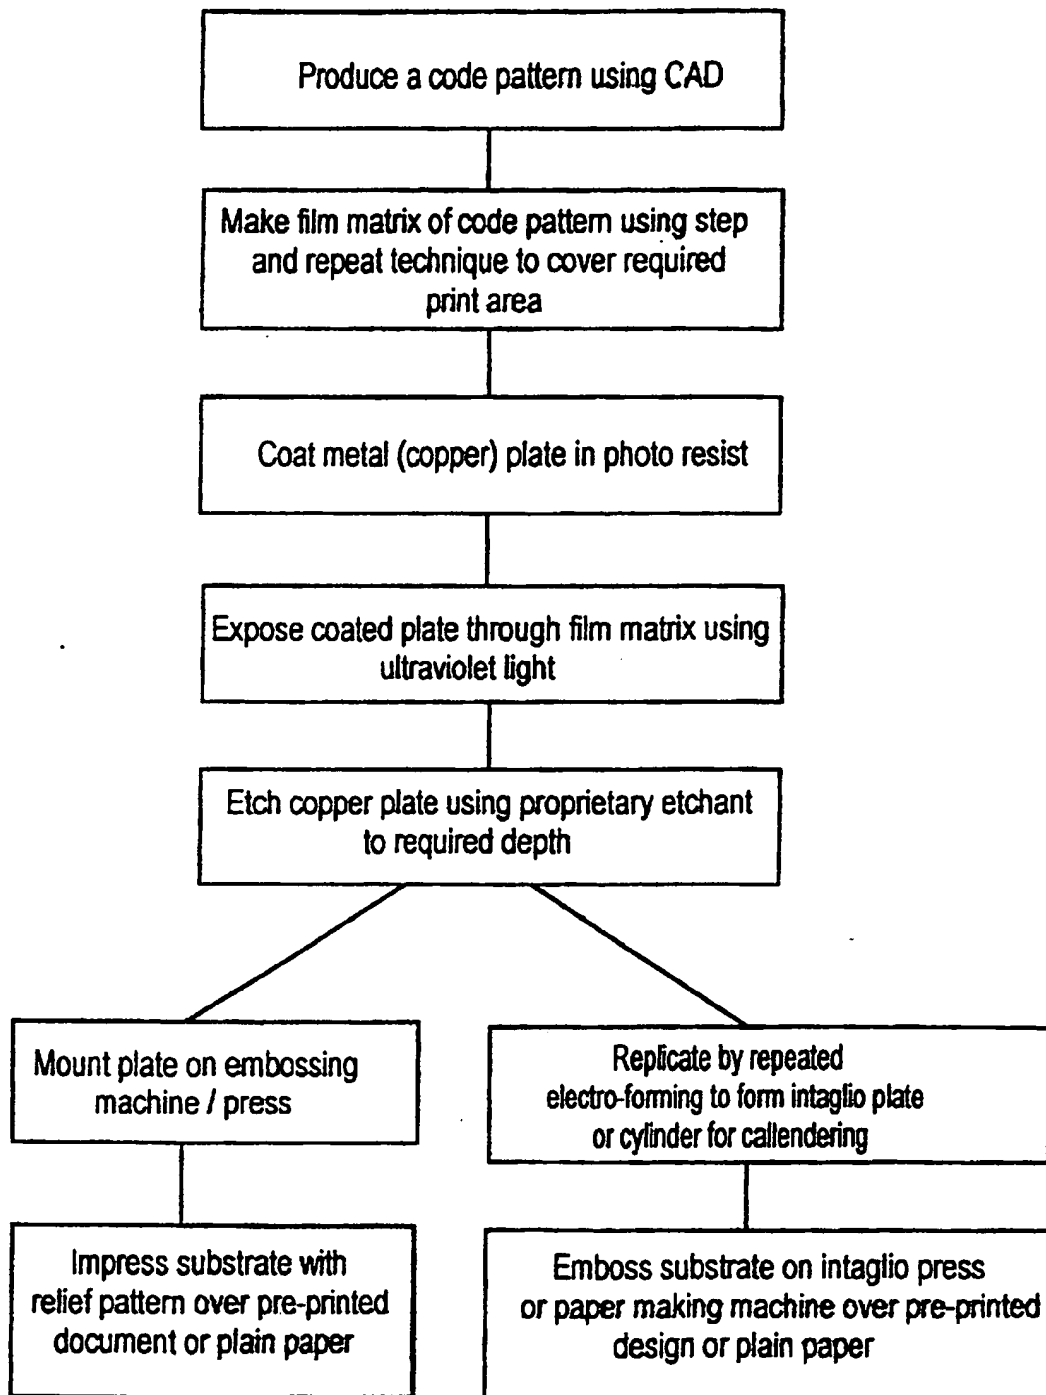


Flow diagram of embossing process

*Fig.3*

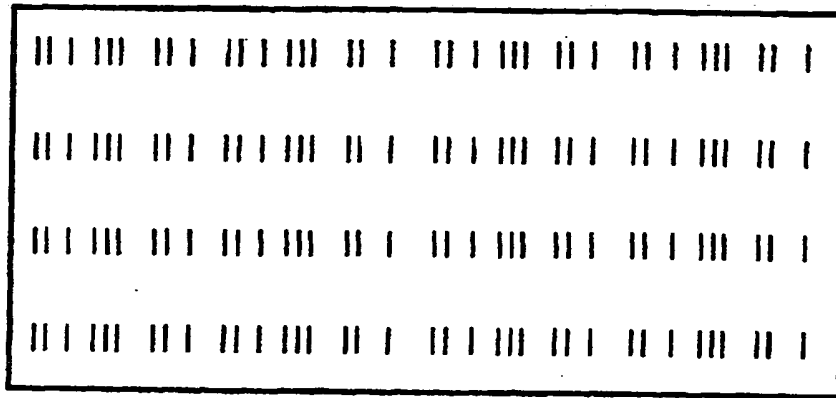


Substrate imaged with barcode turned to black by transforming pixels

*Fig. 4*

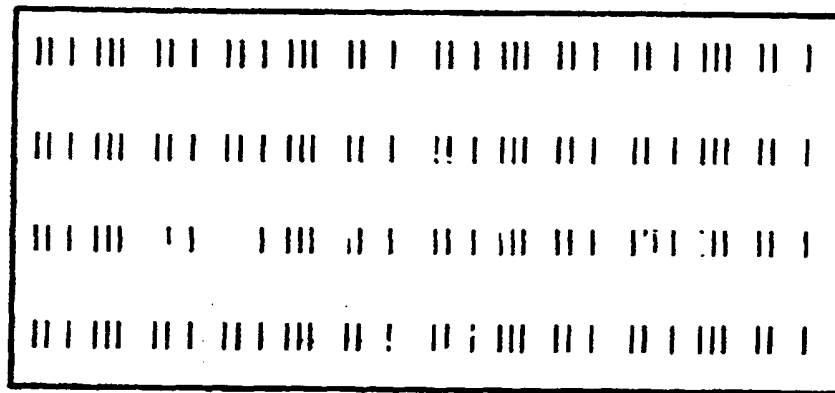

Banknote image converted to 'white' to show code only

*Fig. 5*

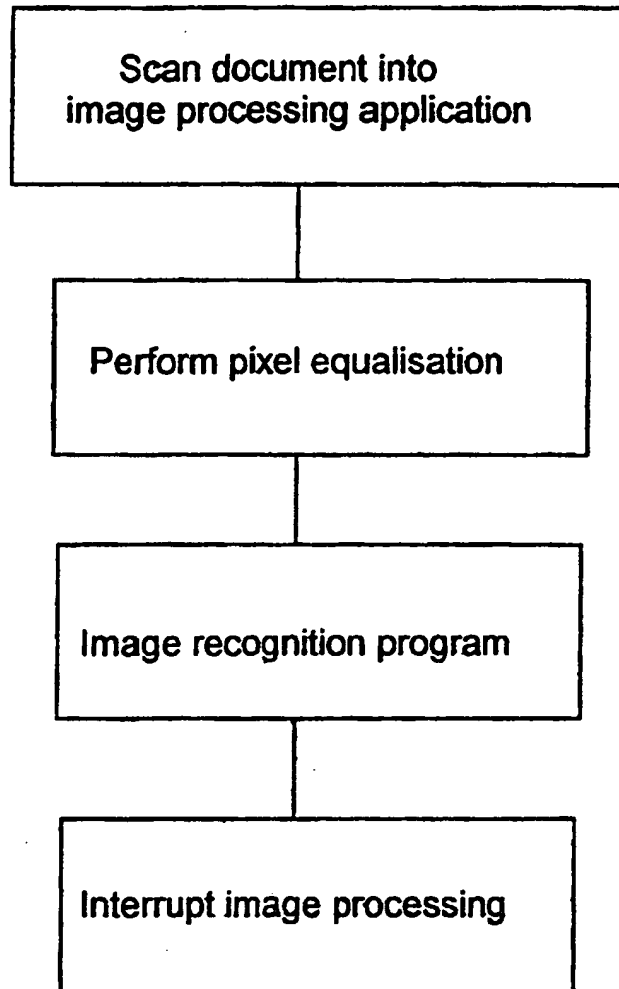

*Fig.6*

**THIS PAGE BLANK (USPTO)**